

KOSHIN

PB-68011 PONSTAR

NEW 3" 2HP SUBMERSIBLE PUMP




FEATURES

- Full water channel design to cool the motor for maximum endurance.
- Double Silicon Carbide mechanical seal in oil bath for extended running.
- 110V or 220V dual AC voltage design. (See instructions)
- Uni-body constructed 40' power cord for water tightness.
- 2HP motor with thermal protector for overload protection.

APPLICATIONS

- Construction site—excavations, manhole well casings, utilities, vault draining;
Residential—draining of basement, swimming pools, general dewatering.

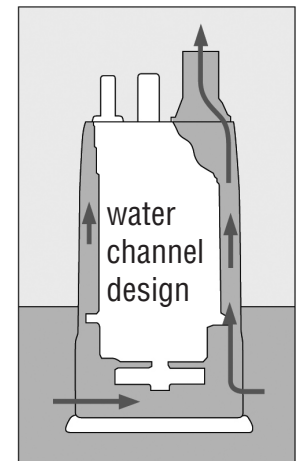


SPECIFICATIONS

	Model	PB-68011
Pump	Connection Dia	3" (80 mm)
	Max. Head	61 ft (19 m)
	Max. Volume	7286 GPH (460 L/min)
Motor	Voltage	AC 110V* / 220V
	Frequency	60 Hz
	Rates Current	15 A
	Output	1.5 kW / 2HP
	Consumption	1.8 kW
Power Cord		40 ft (13 m)
Net Weight		80 lbs (36.29 kg)

For the purpose of improvement, specifications are subject to changes without notice. *Wired from factory @110VAC

PERFORMANCE CURVE

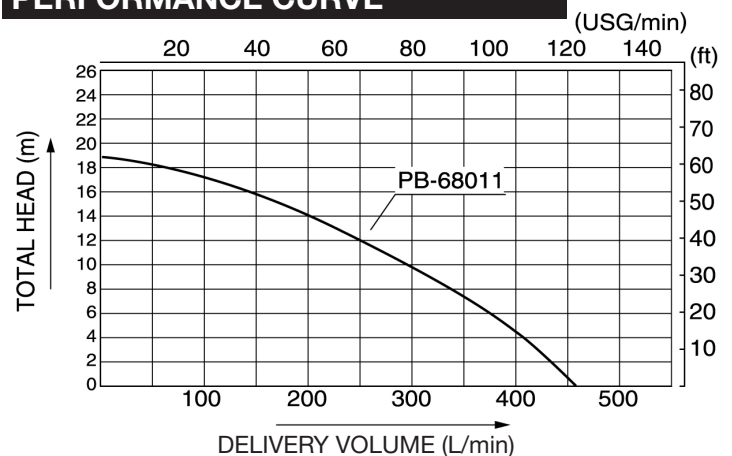

Note: Performance ratings are guaranteed minimum, not inflated maximum.

Distributed by:



KOSHIN

KOSHIN AMERICA CORP.

1218 Remington Rd. • Schaumburg, IL 60173
Toll Free 800-634-7092 • 847-884-1570 • Fax 847-310-0740
www.koshinamerica.com (for U.S. & Canada)