



KOSHIN 4" CENTRIFUGAL PUMP



SEH-100X

Features

- All impellers and volutes are constructed of cast iron for durability and long operating life.
- Pump casing is made of die cast aluminum for lightweight portability and strength.
- Protected from damage by a sturdy steel roll cage. Vibration isolators are built-in.
- Low oil sensor is standard.
- Self priming to 26 feet, maximum head up to 187 feet.


Applications

- Construction and industrial dewatering.
- Utilities, manhole and vault draining.
- Landscape and irrigation.

Specifications

Model	SEH-100X
Discharge Size	4"
Maximum Capacity	383 G.P.M
Maximum Head	92 Ft.
Maximum Suction	26 Ft.
Maximum Pressure	39.8 PSA
Engine Type	Honda GX 240
Displacement	242 CC
Horse Power	8.0 HP
Fuel Capacity	1.58 Gal.
Fuel	Gasoline
Continuous Operation Time Per Tank	3.0 Hrs.
Dimensions LxHxW	26"x20"x26"
Net Weight	123 lbs.

Performance Curve

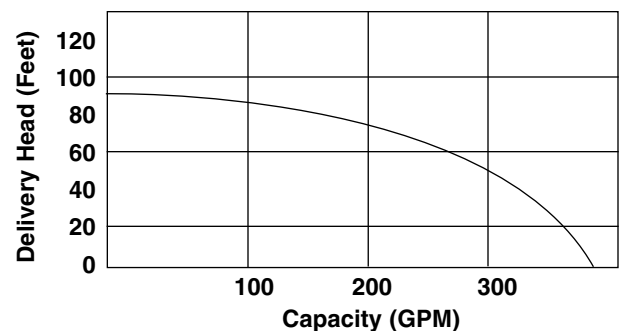

KOSHIN AMERICA CORP.

1218 Remington Road • Schaumburg, IL 60173
847/884-1570 • 800/634-4092 • FAX 847/310-0740

Distributed by: