



THE PROBLEM SOLVER

THE RENTAL PUMP SEMI TRASH



Features

- Powerful O.H.V. Honda engine with low oil sensor.
- Lightweight cast aluminum casing 56 lbs. and 75 lbs.
- Full roll cage frame protects pump and engine.
- Silicon carbide mechanical seal. Increased abrasive resistance.
- Impeller and volute manufactured from Spheroidal Graphite cast iron.
- Longer life, less maintenance.
- Strainer and wrench standard.


Applications

- Those “iffy” pumping situations, general dewatering.
- Pumping high abrasive and solids.
- Longer lasting pump for your rental fleet.

Specifications

Model	SEH-50T	SEH-80T
Connection Dia.	2" x 2"	3" x 3"
Maximum Capacity	9000 GPH	14,400 GPH
Max. Head	75 Feet	98 Feet
Max. Suction Lift	26 Feet	26 Feet
Engine	Honda GX-120 4.0 Horsepower 4 Cycle oil alert	Honda GX-160 5.5 Horsepower 4 Cycle oil alert

Performance

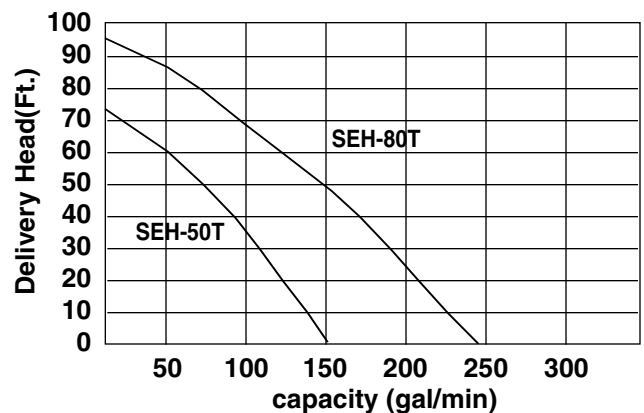

KOSHIN AMERICA CORP.

1218 Remington Road • Schaumburg, IL 60173
847/884-1570 • 800/634-4092 • FAX 847/310-0740

Distributed by: